

**KDF-K DUPLEX FILTER**

**GENERAL**

1	Identification (KKS)		Size of body	2
2	Nominal Diameter	DN20	Rating	16 bar
3	KKS (line)		DN	20,0
4	Design codes in acc. to	AD2000-Merkblatt / PED 2014/68/EU		
5	Model identification	KDF-K		
6	Fluid filtered			
7	Service			

**TYPE OF CONNECTIONS**

8		DN	Rating	
9	INLET	20	PN16	
10	OUTLET	20	PN16	
11	Drain	3/8"	N/A	
12	Vent	1/4"	N/A	
13	Differential pressure	1/4"	N/A	

**OPERATING AND DESIGN PARAMETERS**

DESIGN CONDITIONS		OPERATING CONDITIONS	
15	Pressure	16 bar	Pressure
16	Temperature	-10/+85 (+120*) °C	Temperature
17	Flow	3 m³/h	Flow
18	Pressure drop		Pressure drop
19	ΔP clean filter	0,05 bar (≥100µm)	ΔP clean filter
20	ΔP dirty filter	2 bar (basket design pressure)	ΔP dirty filter
21	Noise level	N/A - no source of noise	Noise level
			N/A - no source

**DESCRIPTIVE CHARACTERISTICS**

22	LOCATION OF EQUIPMENT	<input type="checkbox"/> Outside <input type="checkbox"/> Inside <input type="checkbox"/> Other
23	FILTER ELEMENT	
24	Type	Basket
25	Basket area	270 cm²
26	Grade of filtration	20-10000µm
27	MATERIALS	
28	Body	EN-GJS-500-7 / GGG-50 / BS 500-7 / ASTM 536 80-55-06 / JIS FCD 500-7
29	Cover	EN-GJS-500-7 / GGG-50 / BS 500-7 / ASTM 536 80-55-06 / JIS FCD 500-7
30	Gasket	NBR*
31	Vent & Drain plug	SS316ti
32	Studs	Steel, galvanized
33	Nuts	Steel, galvanized
34	Screen	SS316
35	Perforated plate	SS316

**ACCESSORIES**

36	Pressure drop indicator	<input type="checkbox"/> Yes <input type="checkbox"/> No
37	Magnetic filter insert	<input type="checkbox"/> Yes <input type="checkbox"/> No

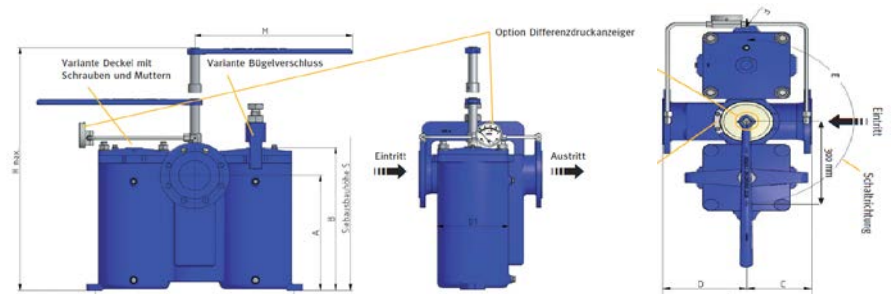
**TESTS AND NON DESTRUCTIVE EXAMINATIONS**

		SCOPE		APPLICABLE RULE
39	Hydrostatic Test	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		AD2000-Merkblatt / PED 2014/6
40	Visual inspection	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	100 %	
41	CE- Declaration of Conformity	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Operating data is necessary !	PED 2014/68/EU
42	Others	<input type="checkbox"/> Yes <input type="checkbox"/> No		
43				
44	Information			Foundry certified by LR / Lloyds

**COATING**

45	INTERNAL	Anti corrosive oil
46	EXTERNAL	Epoxy paint RAL 5010 blue

**DIMENSIONS AND WEIGHT**

47		<b>Dimensionen</b>	
48		A	185,0
49		B	242,0
50		C	80,0
51		D	95,0
52		E	290,0
53		F	14,0
54		S	450,0
	L	420,0	
	M	175,0	
	Weight	300,0	
		22,0	

**REMARKS**

55	* on request.
56	
57	
58	
59	
60	08/2021 © by Krone Filter Solutions GmbH, subject to change

KDFK-2-20  
2  
18.08.2021  
DE  
AM  
r Solutions GmbH  
1 de / of 1

[Redacted]

[Redacted]

bar g

°C

kg/h

bar ( $\geq 100\mu\text{m}$ )

bar

of noise

[Redacted]

[Redacted]

[Redacted]

E

8/EU

[Redacted]

[Redacted]

[Redacted]

mm

mm

mm

mm

mm

mm

mm

mm

kg

[Redacted]

[Redacted]

[Redacted]